


**PRODOTTI / PRODUCTS**

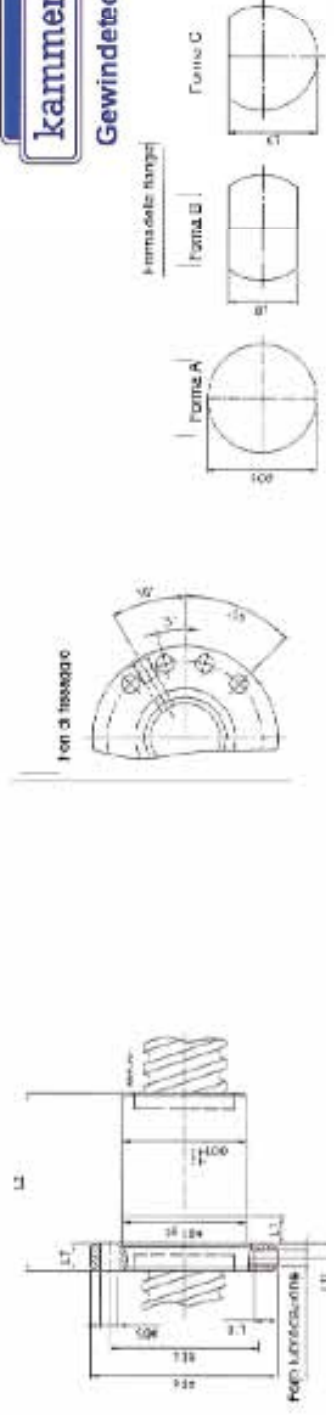

**Dati tecnici**

Ø Nominale x P	Ø vite h6	Ø sfera	Ø fondo gola	D1 <sub>96</sub>	D4	N. fori fissaggio	D5	D6	L1	L2	L7	L8	L9	L10	L11	Foro di lubrificaz.	Cdyn (KN)	Cstat (KN)	N. circuiti interni
KGT 80x20	80	15	68,6	135	155	8	13,5	175	25	230	40	140	158	10	20	M8x1	419	856	6
KGT 80x20	80	15	68,6	135	155	8	13,5	175	25	270	40	140	158	10	20	M8x1	541	1155	8
KGT 80x20	80	15	68,6	135	155	8	13,5	175	25	310	40	140	158	10	20	M8x1	660	1463	10
KGT 80x40P20	80	15	68,6	135	155	8	13,5	175	25	350	40	140	158	10	20	M8x1	595	1304	6
KGT 100x20	100	15	88,6	160	186	8	17,5	212	40	222	40	165	189	10	20	M8x1	466	1077	6
KGT 100x20	100	15	88,6	160	186	8	17,5	212	40	262	40	165	189	10	20	M8x1	603	1459	8
KGT 100x20	100	15	88,6	160	186	8	17,5	212	40	302	40	165	189	10	20	M8x1	734	1832	10
KGT 100x25	100	20	85,0	180	206	8	17,5	232	40	270	40	185	209	10	20	M8x1	682	1424	6
KGT 100x25	100	20	85,0	180	206	8	17,5	232	40	320	40	185	209	10	20	M8x1	881	1924	8
KGT 100x25	100	20	85,0	180	206	8	17,5	232	40	370	40	185	209	10	20	M8x1	1073	2439	10
KGT 100x50P25	100	20	85,0	180	206	8	17,5	232	40	370	40	185	209	10	20	M8x1	828	1798	5
KGT 120x20	120	15	108,6	200	233	8	22,0	265	40	255	50	205	235	10	25	M8x1	506	1298	6
KGT 120x20	120	15	108,6	200	233	8	22,0	265	40	295	50	205	235	10	25	M8x1	653	1754	8
KGT 120x20	120	15	108,6	200	233	8	22,0	265	40	335	50	205	235	10	25	M8x1	795	2210	10
KGT 120x25	120	20	105,0	200	233	8	22,0	265	40	310	50	205	235	10	25	M8x1	746	1718	6
KGT 120x25	120	20	105,0	200	233	8	22,0	265	40	360	50	205	235	10	25	M8x1	964	2332	8
KGT 120x25	120	20	105,0	200	233	8	22,0	265	40	410	50	205	235	10	25	M8x1	1174	2931	10
KGT 120x50P25	120	20	105,0	200	233	8	22,0	265	40	410	50	205	235	10	25	M8x1	907	2160	5
KGT 160x20	160	15	148,6	260	300	8	22,0	340	40	280	55	265	302,5	10	27,5	M8x1	570	1730	6
KGT 160x20	160	15	148,6	260	300	8	22,0	340	40	320	55	265	302,5	10	27,5	M8x1	736	2342	8
KGT 160x20	160	15	148,6	260	300	8	22,0	340	40	360	55	265	302,5	10	27,5	M8x1	896	2955	10
KGT 160x25	160	20	145,0	260	300	8	22,0	340	40	305	55	265	302,5	10	27,5	M8x1	849	2307	6
KGT 160x25	160	20	145,0	260	300	8	22,0	340	40	355	55	265	302,5	10	27,5	M8x1	1097	3118	8
KGT 160x25	160	20	145,0	260	300	8	22,0	340	40	405	55	265	302,5	10	27,5	M8x1	1336	3929	10
KGT 160x50P25	160	20	145,0	260	300	8	22,0	340	40	405	55	265	302,5	10	27,5	M8x1	1034	2906	5

Si consiglia l'utilizzo di viti classe 12.9 per il fissaggio